

### Orchard Tunnel Installation Instructions ORU070/ORW070

### Tunnel Installation Instructions




- 1 Read all instructions carefully before starting the assembly.
- 2 Check using the parts list and fixing kit list that none of the components are mssing. If any parts are missing contact our Sales Office.
- 3 Plan the final position of the play equipment ensuring there is sufficient space. See the ground plan for recommended safety surfacing area and critical fall heights to EN1176.
- 4 Excavate the foundation holes in accordance with the plan. Orchard is designed to be installed onto a level site.
- 5 Fit the ground fixings OPA001/OPA002 to the bottom of the relevant logs, following the instruction sheet on page 04.
- 6 Erect the main logs into the foundation holes using the ground plan for reference. Each log is numbered at the top, and marked at the base with an X.
- 7 Assemble the activities to the logs prior to concreting into position.
- 8 When all the activities are fitted, fill the foundation holes to the required depth with concrete.
- 9 Do not allow the equipment to be used until the concrete has set (2 3 days) and the required safety surfacing has been installed.
- 10 Check that all fixing bolts are fully tightened. Fit the post caps following the instruction sheet on page 04.
- 11 After one month check all bolts and tighten if necessary. After this one month period insert the rubber log plugs as described on the instruction sheets page 05 and 06.
- 12 Follow the maintenance instructions supplied.

During installation care must be taken to prevent hazards to children. Care should be taken if conditions are abnormal.

# Teldo IIII

Ref Description
OPA001/002 Ground Fixing
DZA280 Tunnel
DZA095 Arch Top Rail
OPU070 Logs (set of 4)
ORU070F Fixing Kit

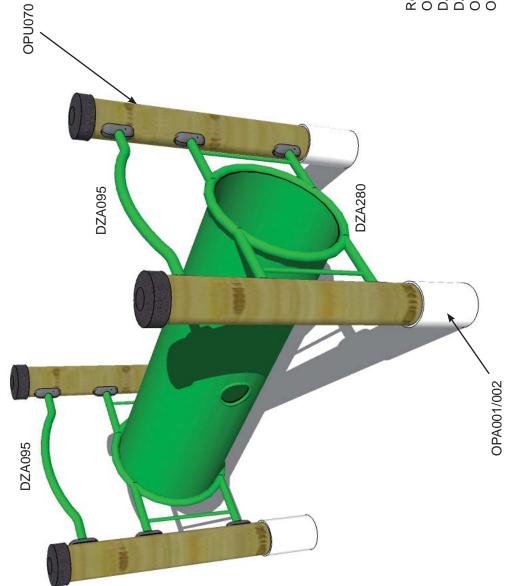

ORU070/ORW070
Tunnel
Parts List


Rev 01





FIT RUBBER CAPS TO THE END OF THE LOGS AND FIX IN POSITION USING 3 OFF WDS450 PER JOINT.

NOTE THE RUBBER CAPS ARE A TIGHT FIT ON THE LOGS.

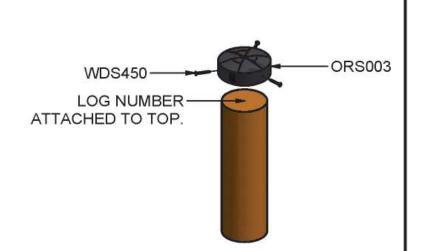


PARTS PER JOINT				
STOCK CODE	DESCRIPTION	QTY		
ORS003	RUBBER POST CAP	1		
WDS450	12 x 2" CSK POZI SCREW	3		

### **GROUND FIXINGS**

IMPORTANT NOTE

INSERT THE LOGS INTO THE GROUND FIXINGS 200MM ONLY. THE BOTTOM OF THE LOG SHOULD LINE UP WITH THE TOP VENTILATION HOLES.




BASE OF THE LOG MAKED WITH AN X.

OPA001 GROUND FIXING FOR WET POUR (SHOWN) OPA002 GROUND FIXING FOR LOOSE FILL

PARTS PER GROUND FIXING				
STOCK CODE	DESCRIPTION	QTY		
HSS530	M10 x 100 COACH SCREW BZP	3		
OPA001/002	ALLOY GROUND FIXING ANODISED	1		

Ref	Description	Qty
PZS001	Plastic Base	12
DZS007	Plastic Covers	12 Pair
STS060	No.8 x 11/4" Self Tap Screw	24
HSS530	M10 x 80 Coach Screw	24
WSR040	M10 Flat Washer	24
WSR420	M10 Serated Washer	24

## Sutcliffe Play

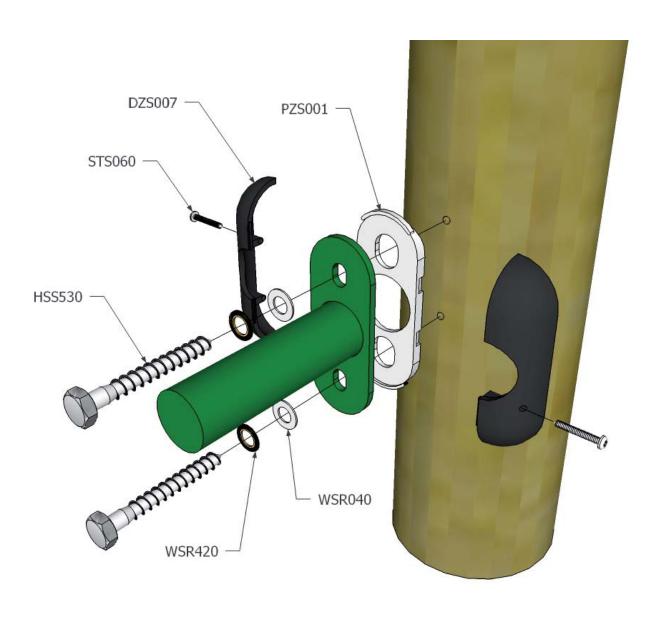

### Tunnel Maintenance Instructions

### NOTE

The warranty is invalidated if these instructions are not followed.

All wood needs annual inspection and retreatment where required.

Recommended Regular Inspection and Maintenance		<b>Inte</b> 14	rval D 28	<b>ays</b> 56	365
Check stability of structure, tighten connections if required.					
Check all uprights at ground level for corrosion and/or rot. Replace any defective parts.					
Check all painted elements for damage, rub down and repaint or replace as required.					
Check chain/ropework assemblies for wear and damage, replace if required.					
Check rotating and pivot points for wear and smooth running lubricate or replace if required.					
Check rubber parts for wear and/or damage, replace if required.					
Check tension cables, adjust if required.					
Check wear of cables, replace if required.					
Check slide chutes for smoothness and any foreign elements, remove any found.					
Check rubber safety surfaces for damage and poor performance, repair or replace if required.					
Check loose fill safety surfaces, remove any foreign elements, rake level and top up if required.					

Suiclifie Play

### **Disposal Instructions**

All components should be broken down into categories of:-

- 1 **Mild Steel** all Swing Frames, Playzone, Toddlerzone, Teenzone activities, Mission, Orchard Deck Frames and Springie Frames.
- 2 Stainless Steel all Slides, Mirror Panels.
- 3 Aluminium all Playzone, Mission and Toddlerzone Posts.
- 4 Galvanised Steel all Chains and Teenzone Posts.
- 5 **Moulded Rubber Products without steel inserts** all Mission and Toddlerzone Caps and edge details.
- 6 Timber all natural timber, plywood, and MDF panels.

Wherever possible these materials should be taken to specialist recycling organisations and recycled. In some cases where composite materials are used, then disposal at land fill sites is the only alternative such as:

- 7 Moulded Rubber Products encasing steel inserts all Swing Seats, Deck Tops, Duo/Dizzy Disc Tops.
- 8 **High Pressure Laminate** all Toddlerzone, Playzone and Teenzone Panels.
- 9 Steel Core Polypropylene Rope all Scramble Nets, Space Nets, Playzone/Toddlerzone/Mission Ropes.