



SWD150 Curlicue Installation Instructions

design
make
play
SutcliffePlay

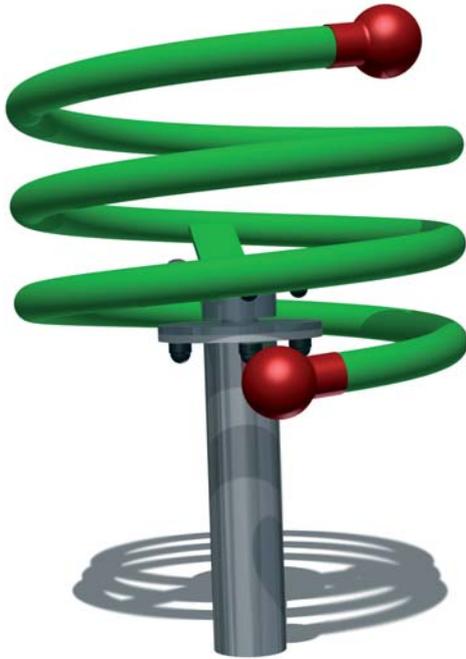


SCALE 1 : 100

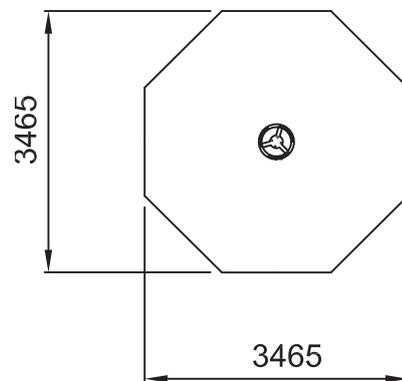

The site must be level to maintain critical dimensions.

Space requirements

1. Safety surface recommended 10m².
2. Length of the safety perimeter 11.5m.
3. HIC 1m.

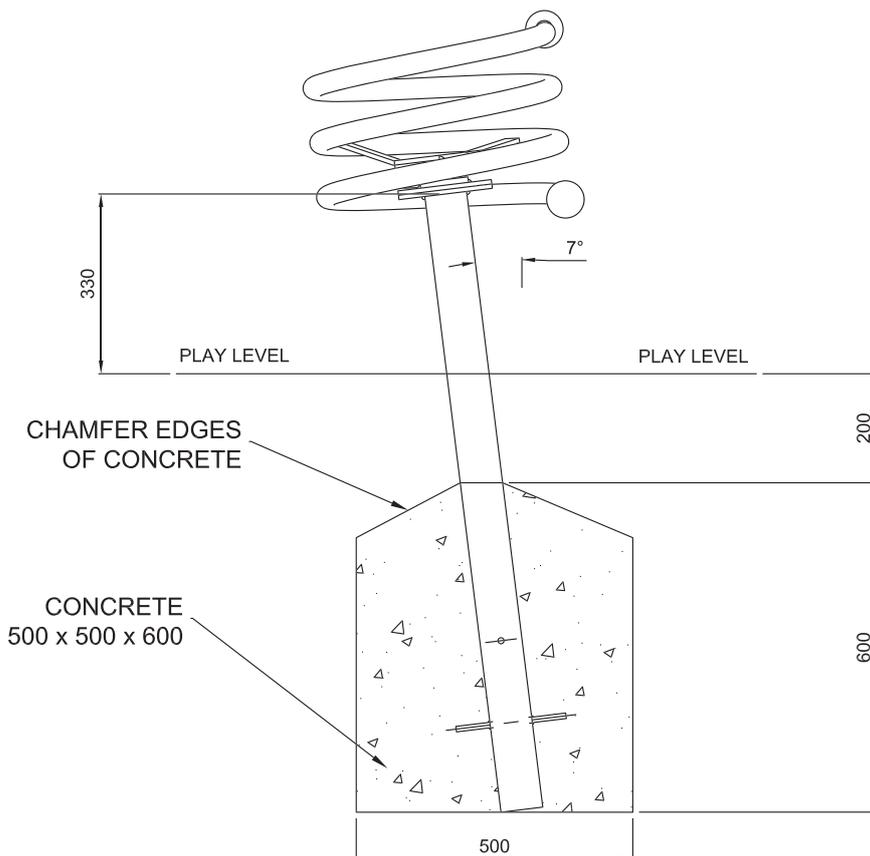

Installation Procedure

1. Plan the final position of the play equipment ensuring there is enough space*.
2. Excavate the foundation hole in accordance with the drawing**.
3. Install the post using the correct amount of concrete. Ensure that the post is at a 7 degree angle and sits 330mm from the bottom of the fixing plate to play level. Allow 2-3 days for the concrete to set before removing any positioning supports.

Do not allow the item to be used until the required safety surface has been installed.

4. Follow the maintenance instructions supplied.
- 5.

* Care should be taken while installing to decrease the hazard for children.

** Care should be taken if the conditions aren't normal.

Parts List

Description	Qty.	Stock	Required Tools:
Curlicue assembly	1	SWD150	Tape Measure Spirit Level Digging Implements



design
make
play

SutcliffePlay

Waggon Lane
 Upton Pontefract
 West Yorkshire WF9 1JS
 Telephone +44 (0) 1977 653200
 Facsimile +44 (0) 1977 653222
 info@sutcliffeplay.co.uk
 www.sutcliffeplay.co.uk

SWD150

Curlicue

Maintenance Instructions



NOTE

The warranty is invalidated if these instructions are not followed.

Recommended Regular Inspection and Maintenance

Check stability of structure, tighten connections if required.

Check all uprights at ground level for corrosion and/or rot. Replace any defective parts.

Check all painted elements for damage, rub down and repaint or replace as required.

Check chain/ropework assemblies for wear and damage, replace if required.

Check rotating and pivot points for wear and smooth running lubricate or replace if required.

Check rubber parts for wear and/or damage, replace if required.

Check tension of cables, adjust if required.

Check wear of cables replace if required.

Check slide chutes for smoothness and any foreign elements, remove any found.

Check rubber safety surfaces for damage and poor performance, repair or replace if required.

Check loose fill safety surfaces remove any foreign elements, rake level and top up if required.

	Interval (days)				
	7	14	28	56	365
Check stability of structure, tighten connections if required.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Check all uprights at ground level for corrosion and/or rot. Replace any defective parts.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Check all painted elements for damage, rub down and repaint or replace as required.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Check chain/ropework assemblies for wear and damage, replace if required.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Check rotating and pivot points for wear and smooth running lubricate or replace if required.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Check rubber parts for wear and/or damage, replace if required.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Check tension of cables, adjust if required.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Check wear of cables replace if required.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Check slide chutes for smoothness and any foreign elements, remove any found.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Check rubber safety surfaces for damage and poor performance, repair or replace if required.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Check loose fill safety surfaces remove any foreign elements, rake level and top up if required.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Disposal Instructions

All components should be broken down into categories of:

1. **Mild steel** - all swing frames, Playzone, Toddlerzone, Teenzone activities, deck frames and springie frames.
2. **Stainless Steel** - all slides, mirror panels.
3. **Aluminium** - all Playzone and Toddlerzone posts and Playzone post caps.
4. **Galvanised steel** - all chains and Teenzone posts.
5. **Moulded rubber products without steel centres** - all Toddlerzone caps and edge details.
6. **Timber** - all natural timber, plywood and mdf panels.

Wherever possible these materials should be taken to specialist recycling organisations and recycled.

In some cases where composite materials are used then disposal at land fill sites is the only alternative such as:

7. **Moulded rubber products encasing steel centres** - all seats, deck tops, duo/dizzy disc tops.
8. **High pressure laminate** - all Toddlerzone, Playzone panels.
9. **Steel core polypropylene rope** - all scramble nets, space nets, Playzone/Toddlerzone ropes and rope bridges.