


design
make
play

SutcliffePlay

Waggon Lane
Upton Pontefract
West Yorkshire WF9 1JS
Telephone +44 (0) 1977 653200
Facsimile +44 (0) 1977 653222
info@sutcliffeplay.co.uk
www.sutcliffeplay.co.uk

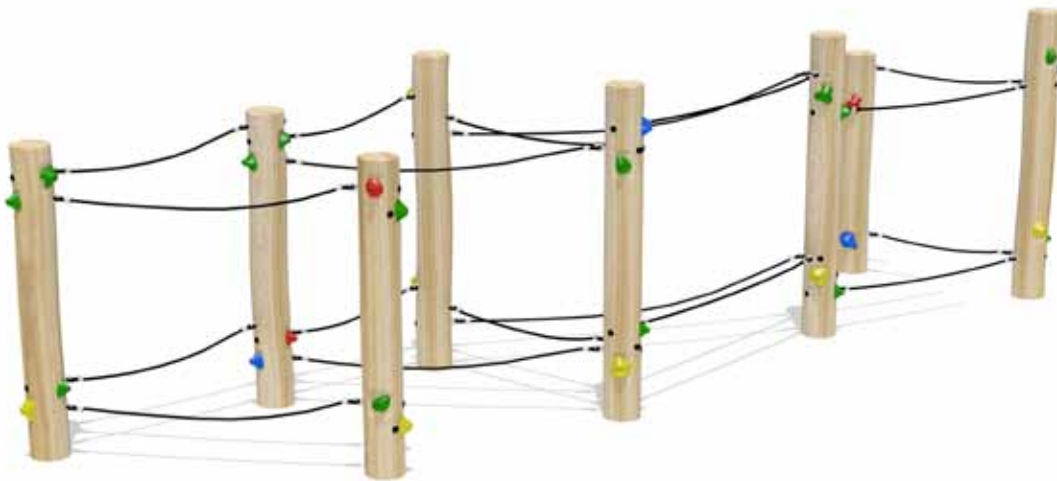

Orchard Cluster of 8 Installation Instructions

ORU117

Suitable for loose fill and wet pour surfacing


ORU117

Cluster of 8 Installation Instructions

- 1 Read all instructions carefully before starting the assembly.
- 2 Plan the final position of the play equipment ensuring there is sufficient space. See the ground plan for recommended safety surfacing area and critical fall heights to EN1176.
- 3 Excavate the foundation holes in accordance with the plan. Orchard is designed to be installed onto a level site.
- 4 Erect the posts into the foundation holes using the ground plan for reference.
- 5 Fill the foundation holes to the required depth with concrete.
- 6 Do not allow the equipment to be used until the concrete has set (2 - 3 days) and the required safety surfacing has been installed.
- 7 Check that all fixing bolts and grips are fully tightened.
- 8 After one month check all bolts and tighten if necessary.
- 9 Follow the maintenance instructions supplied.

NB

During installation care must be taken to prevent hazards to children. Extra care should be taken if conditions are abnormal.

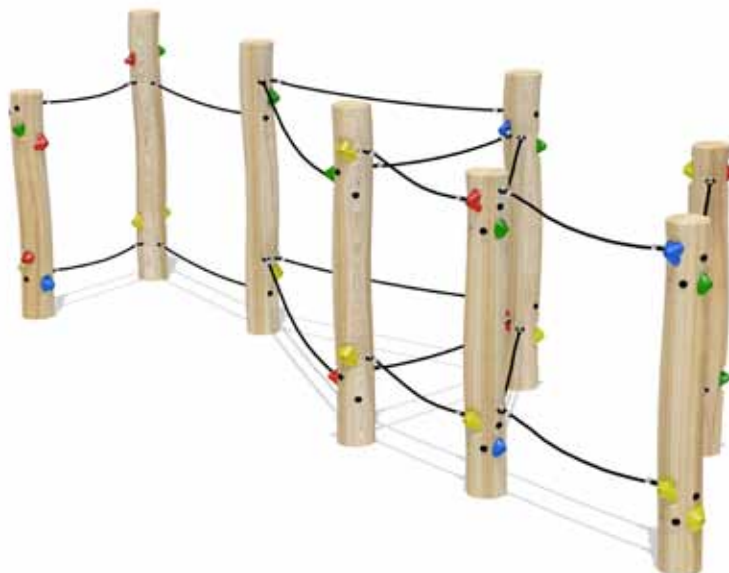


ORU117

Cluster of 8 Installation Instructions


design
make
play

SutcliffePlay

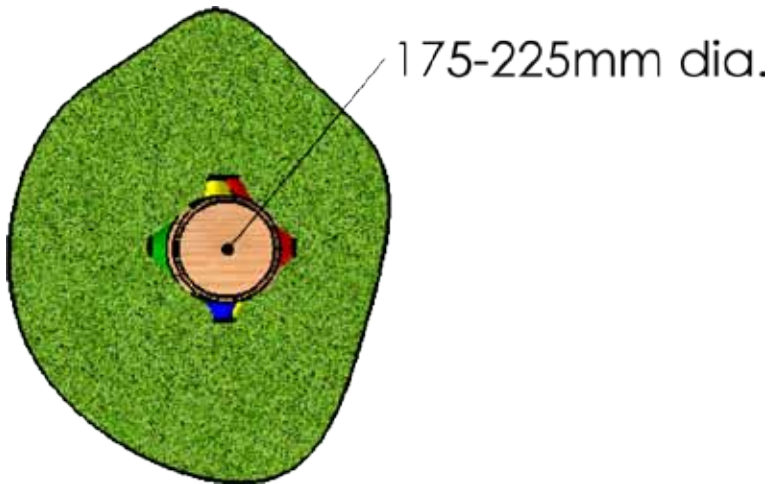

The poles will arrive to site fully assembled with grips.

If you need to replace a grip, Sutcliffe Play supply yellow grips only. Please see below codes for spare parts and assembly:

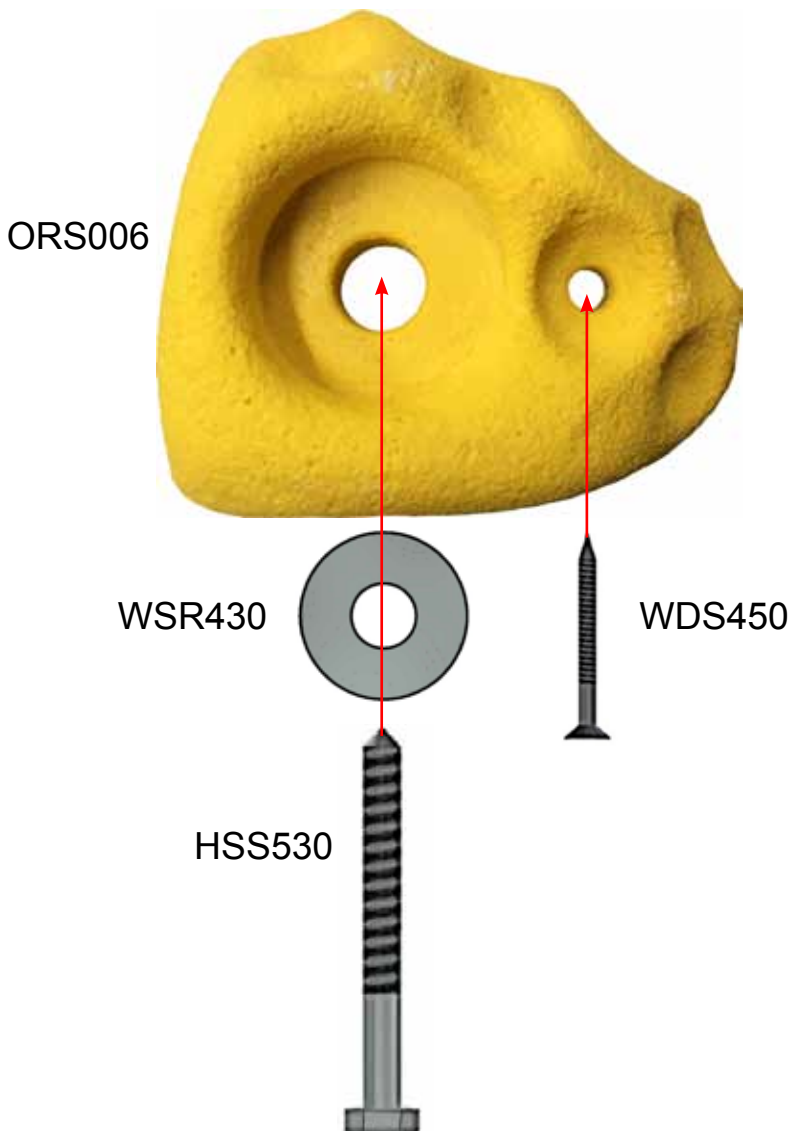


ORU117

Cluster of 8 Installation Instructions

design
make
play

SutcliffePlay

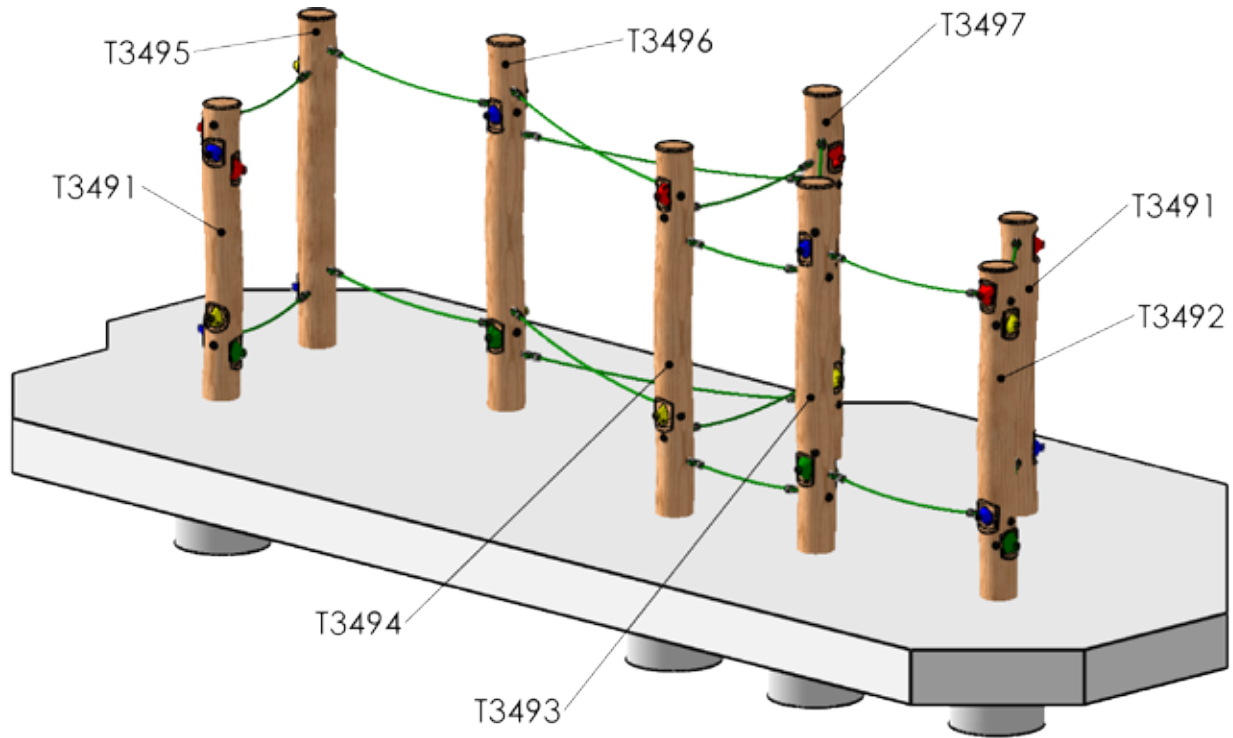



| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------------------|--|------|
| 1 | T3491 | Peeled post. approx 200mm dia cut at 2400mm SC | 2 |
| 2 | T3492 | Peeled post. approx 200mm dia cut at 2600mm SC | 1 |
| 3 | T3493 | Peeled post. approx 200mm dia cut at 2800mm SC | 1 |
| 4 | T3494 | Peeled post. approx 200mm dia cut at 2800mm SC | 1 |
| 5 | T3495 | Peeled post. approx 200mm dia cut at 2600mm SC | 1 |
| 6 | T3496 | Peeled post. approx 200mm dia cut at 2800mm SC | 1 |
| 7 | T3497 | Peeled post. approx 200mm dia cut at 2800mm SC | 1 |
| 8 | ORU 117 Rope A - 1536mm | Rope Walk 1536mm | 2 |
| 9 | ORU 117 Rope B - 1150mm | Rope Walk 1150mm | 2 |
| 10 | ORU 117 Rope C - 850mm | Rope Walk 850mm | 2 |
| 11 | ORU 117 Rope D - 1675mm | Rope Walk 1675mm | 2 |
| 12 | ORU 117 Rope E - 1173mm | Rope Walk 1173mm | 2 |
| 13 | ORU 117 Rope F - 2131mm | Rope Walk 2131mm | 2 |
| 14 | ORU 117 Rope G - 1753mm | Rope Walk 1753mm | 2 |
| 15 | ORU 117 Rope H - 1413mm | Rope Walk 1413mm | 2 |
| 16 | ORU 117 Rope I - 971mm | Rope Walk 971mm | 2 |
| 17 | B0195 | Climb Grips | 34 |

ORU117

Cluster of 8 Installation Instructions

design
make
play

SutcliffePlay

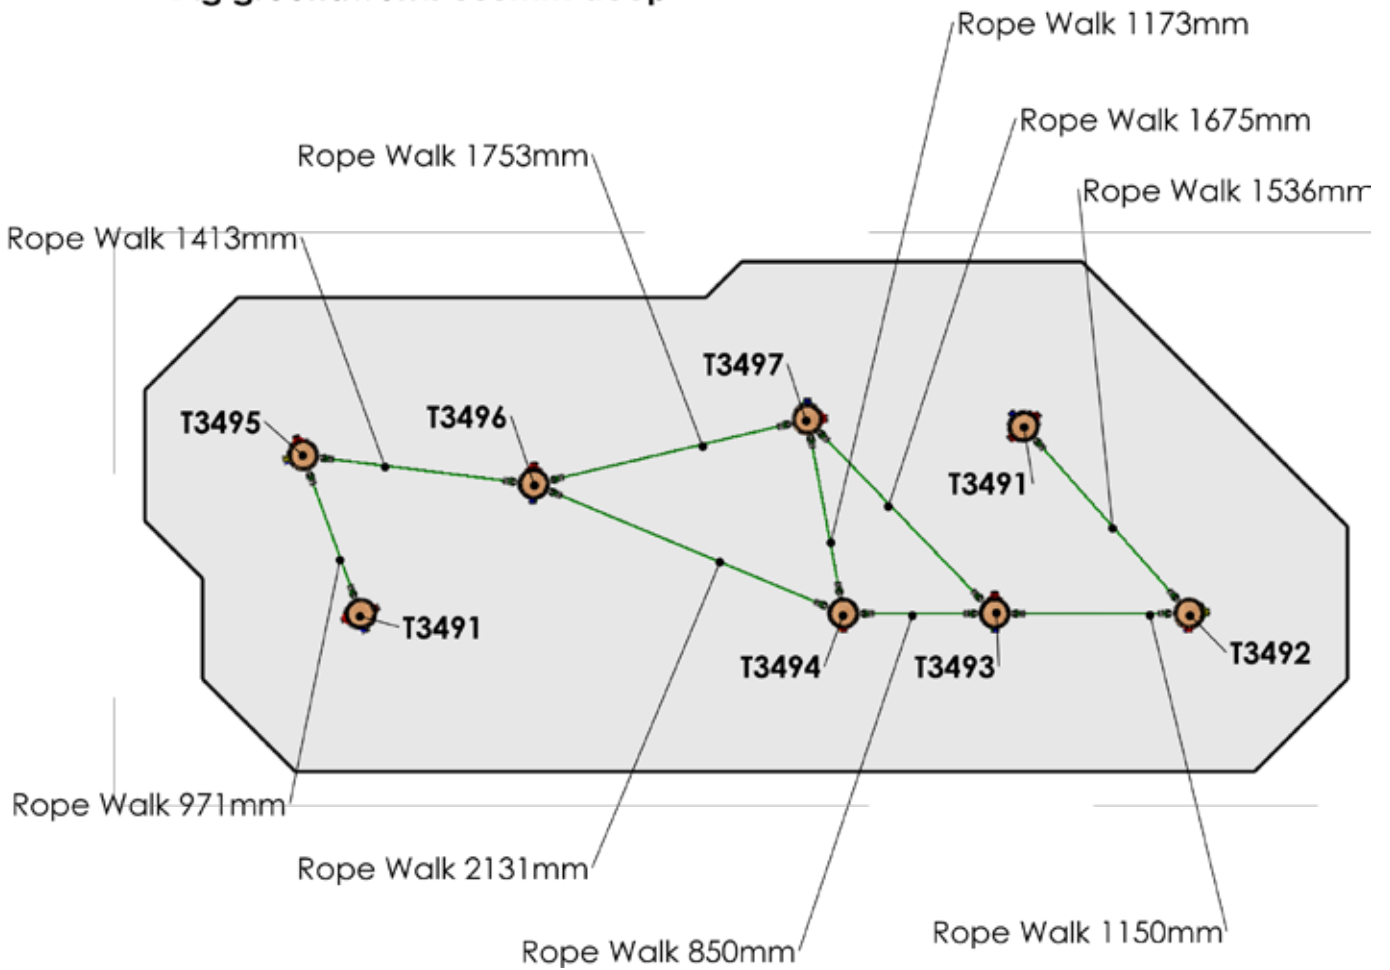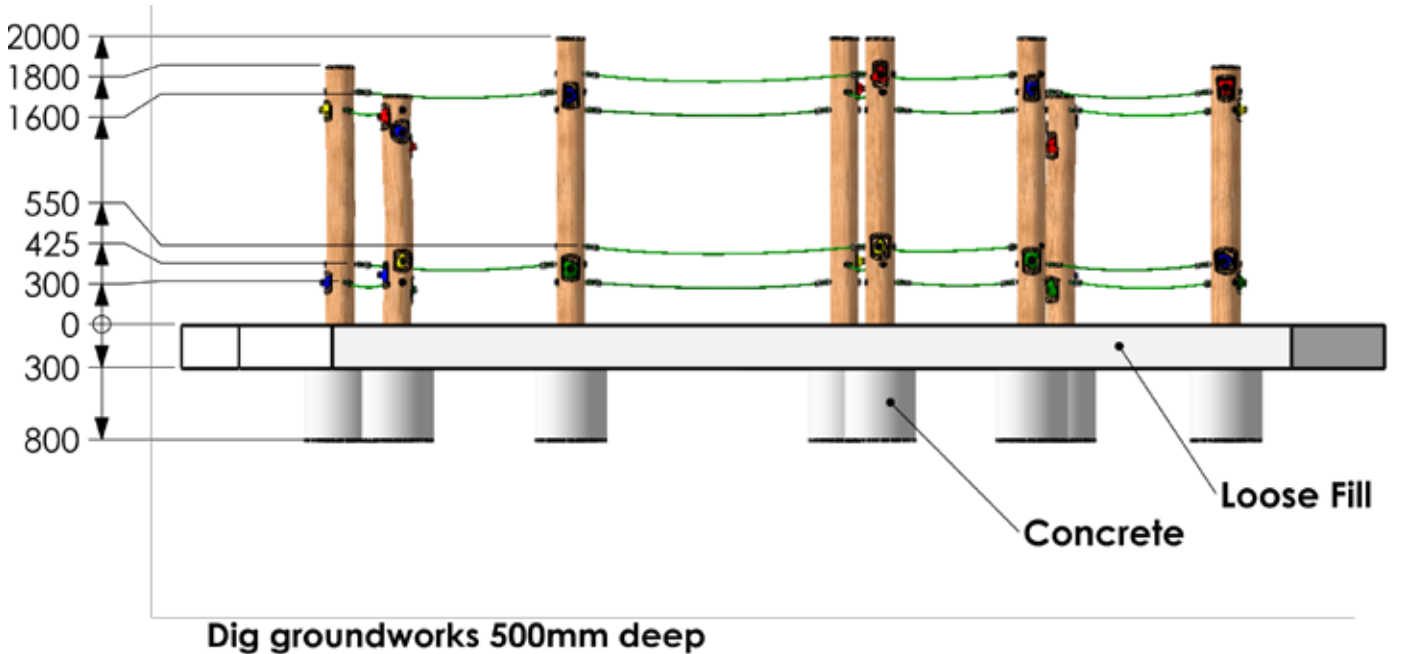


ORU117

Cluster of 8 Installation Instructions

design
make
play

SutcliffePlay

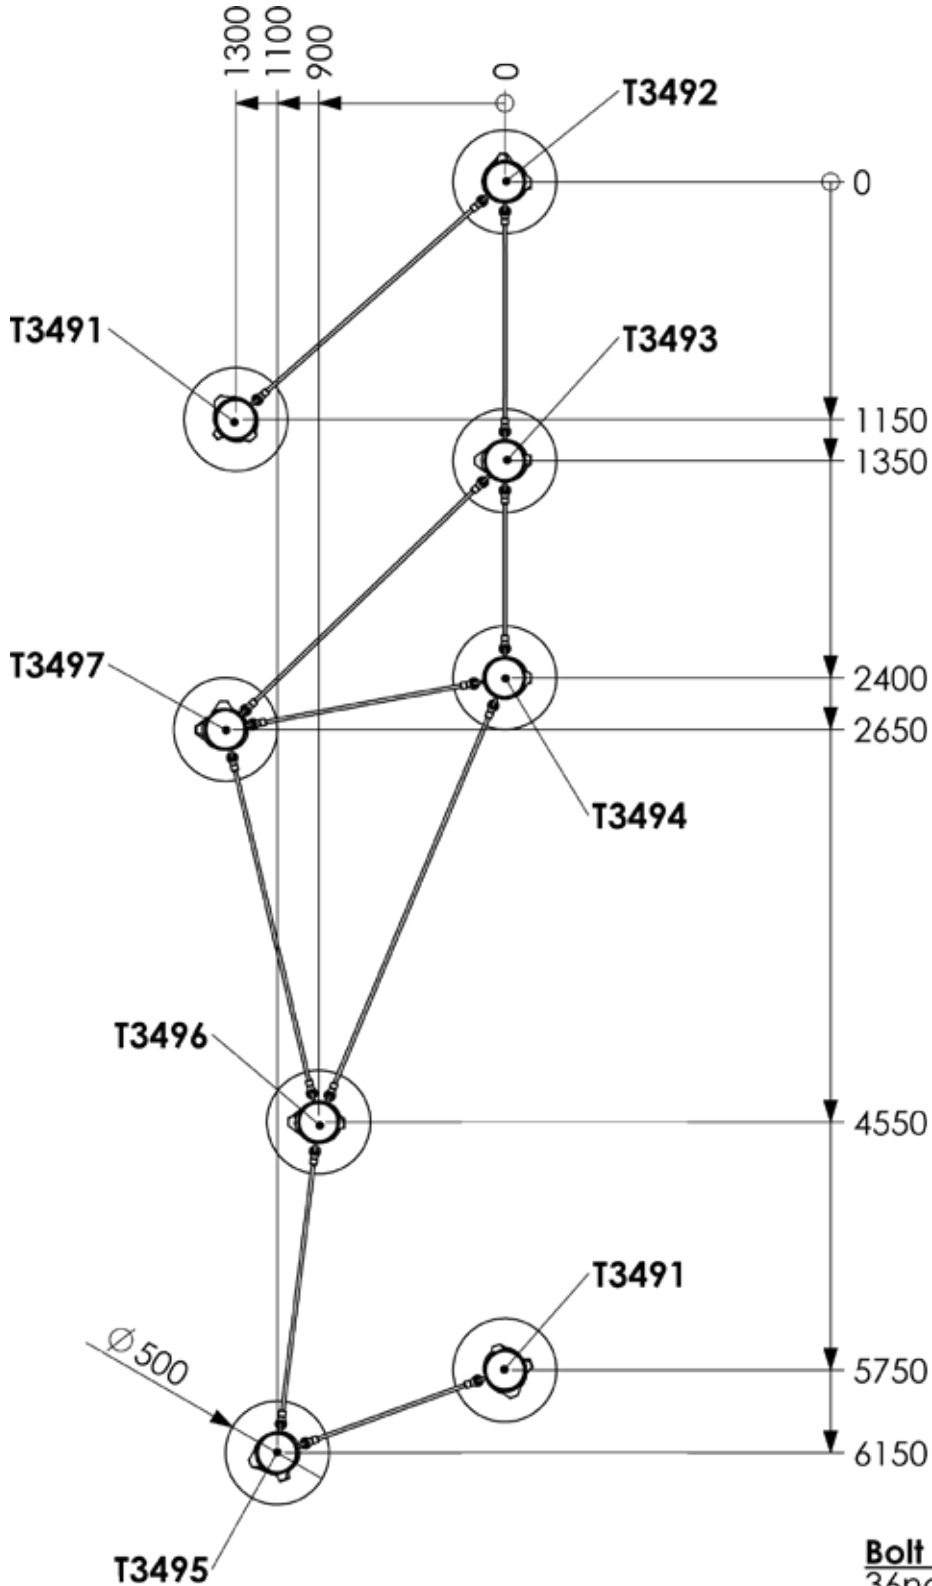

Bolt List


- 36no. M12 Washers
- 36no. M12 Nylock nuts
- 36no. 33mm Black Caps

ORU117

Cluster of 8 Installation Instructions

design
make
play

SutcliffePlay

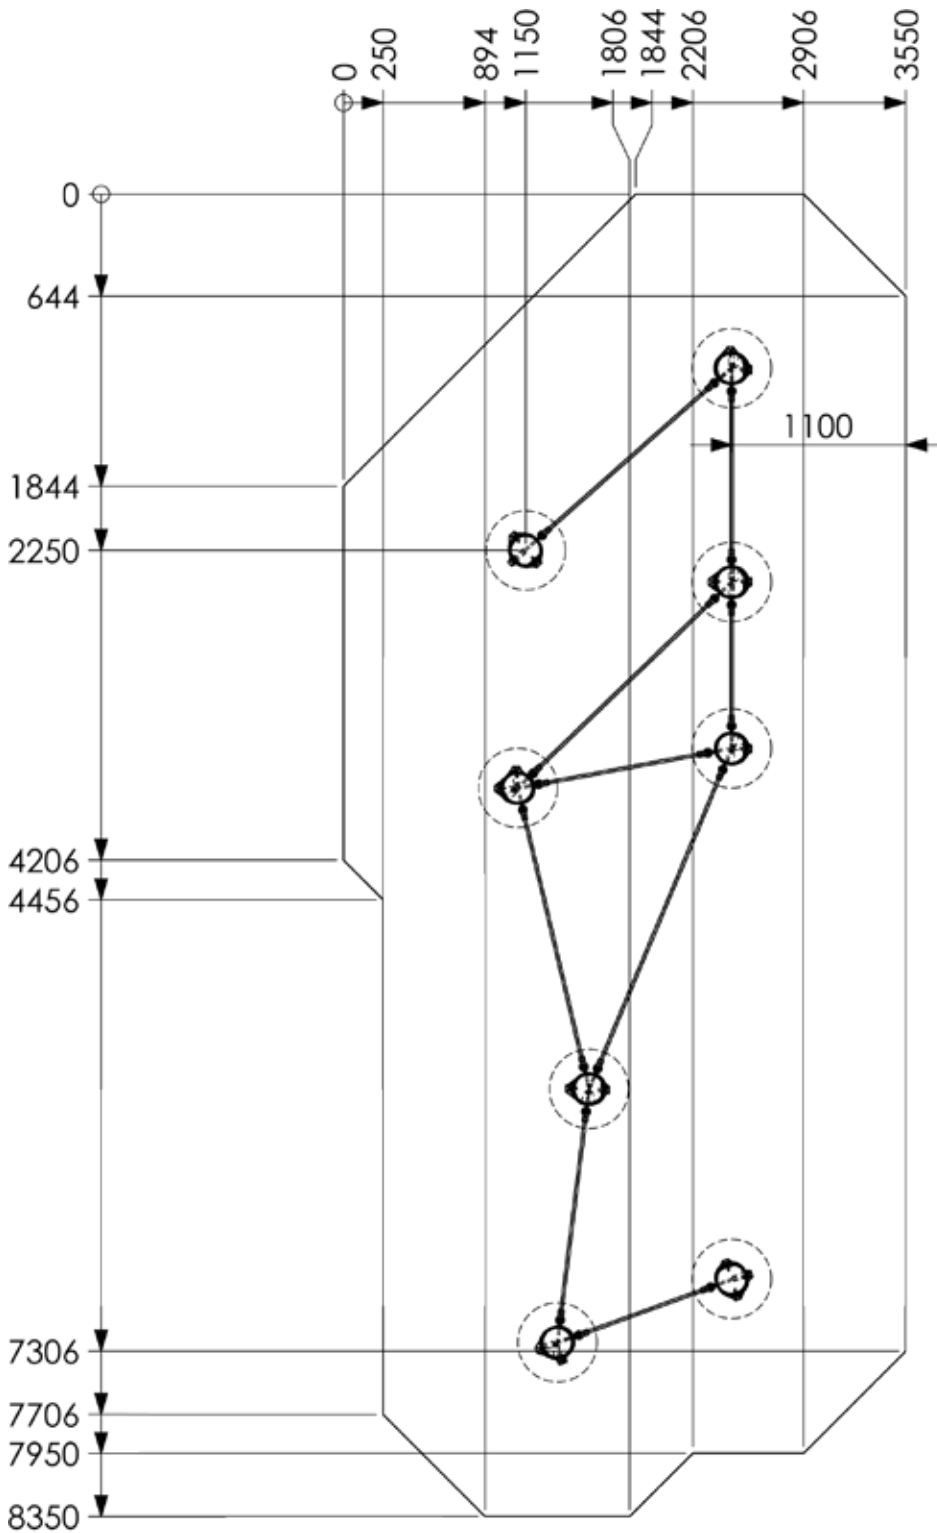

Area = 30.3m²

Please note the surfacing detail is for guidance only as no safety surface is required as free fall height is 600mm

ORU117

Cluster of 8 Maintenance Instructions



NOTE

The warranty is invalidated if these instructions are not followed.
All wood needs annual inspection and retreatment where required.

Recommended Regular Inspection and Maintenance

| | Interval Days | | | | |
|---|--------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| | 7 | 14 | 28 | 56 | 365 |
| Check stability of structure, tighten connections if required. | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Check all uprights at ground level for corrosion and/or rot. Replace any defective parts. | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| Check chain/ropework assemblies for wear and damage, replace if required. | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Check rubber safety surfaces for damage and poor performance, repair or replace if required. | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Check loose fill safety surfaces, remove any foreign elements, rake level and top up if required. | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Disposal Instructions

The timber in this product is pressure treated pine. This kind of timber is not classified as hazardous waste. Local market regulations should be referred to.

Treated timber and processing wastes such as sawdust and offcuts must not be used for animal litter or bedding, or for fuel in barbecues, cooking stoves or grates.

Domestic end users should dispose of any waste treated timber, sawdust and/or ash through the ordinary waster collection service or at a local authority facility.

Any waste timber, sawdust or redundant timber should preferably be recycled by re-use, or disposed of to an authorised landfill or to a correctly controlled and approved waste incinerator.