

Installation Instructions

Treetops 2.4m (8ft) Swing Frame 2 Bay TSF104

Sheet 2 of 5 Rev 00

Installation procedure



1. Plan the final position of the play equipment ensuring that there is sufficient space*.




- 2. Excavate the foundation hole in accordance with the plan and elevation**.
- 3. Assemble the swing frame on the ground, ensure all fixings are secure.
- 4. Carefully lift the frame into the foundation holes ensuring it is not twisted. It is important that the top tube is horizontal, please use a spirit level to check this.
- 5. The height from the centre of the top bar to the play level is 2.4m.
- 6. When the frame is positioned correctly in the foundation holes, fit the spragging irons and fill with concrete. Ensure that the concrete foundations slope away slightly from each leg to prevent water collecting.
- 7. Do not allow the equipment to be used until the concrete has set (2-3 days) and the required safety surfacing has been installed.
- 8. Check all fixings are tightened and hang the required swing seats to the frame.
- 9. Follow the Maintenance Instructions provided.
 - * Care should be taken during installation to decrease the hazard to children.
 - ** Extra care should be taken if the conditions aren't normal.


Parts supplied

	Description	Qty	Stock Code		
1	Top Bar 2 Seat	2	TSF114		
2	8Ft Back Leg	3	TSF001		
3	8Ft Front Leg	3	TSF002		
4	End Shoe	2	TSF008		
5	Central Shoe	1	TSF009		
6	Fixing Kit	1	TSF104F		

Required tools for installation

Tape measure
Spirit level
Step Ladder
Digging equipment
M16 Ring Spanner or Socket

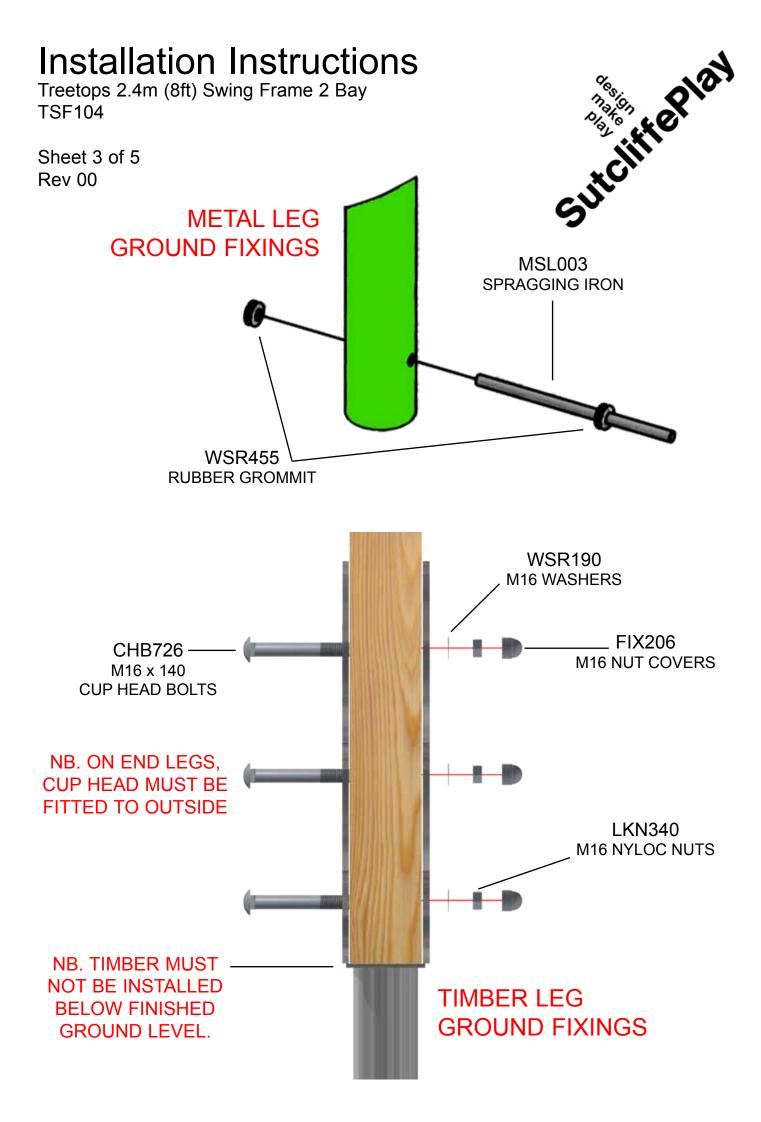

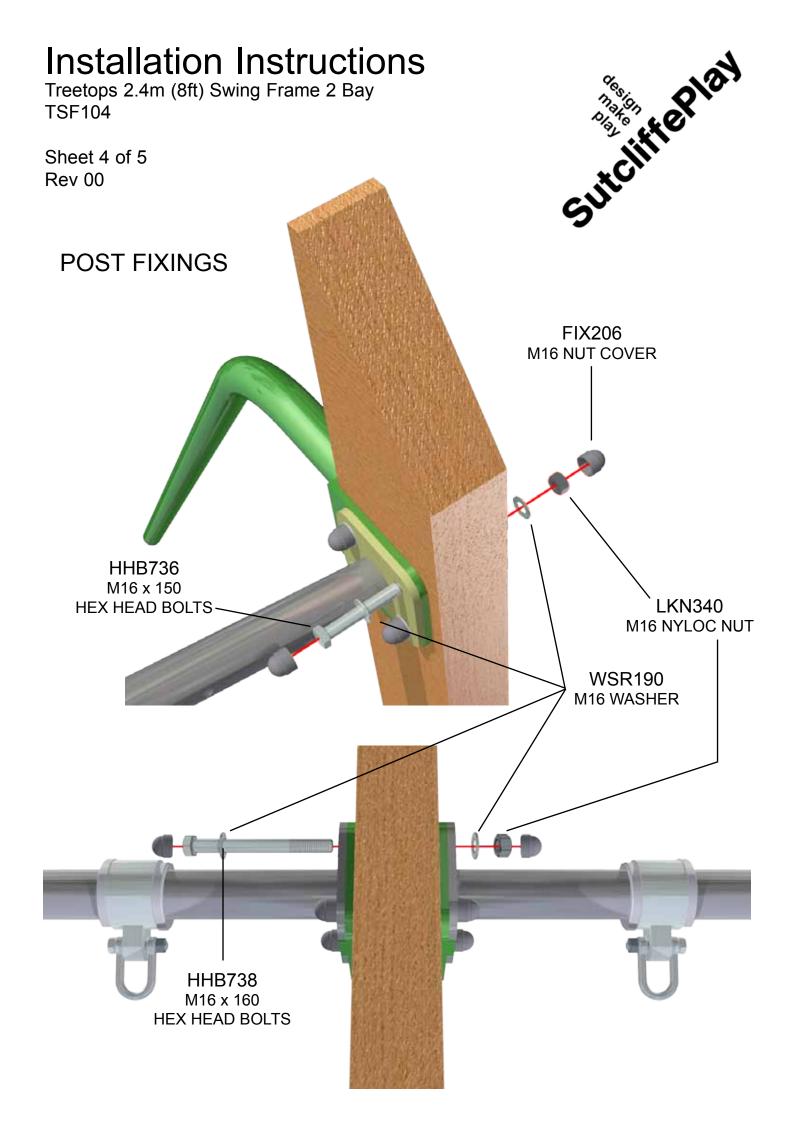

Maintenance Instructions

Percentage of the Percentage o

Treetops 2.4m (8ft) Swing Frame 2 Bay **TSF104**

Sheet 5 of 5 Rev 00

NB The warranty is invalidated if these instructions are not followed.



Recommended regular inspection and maintenance	7	Inte 14	rval d 28	ays 56	365
Check stability of structure, tighten connections if required.					
Check all timber for structural integrity / delamination. Replace any defective parts.					
Check parts at ground level for corrosion and/or rot. Replace any defective parts					
Check all painted elements for damage, rub down and repaint or replace as required.					
Check all ropework assemblies for wear and damage, replace if required.					
Check rotating pivot points for wear and smooth running lubricate or replace if required.					
Check rubber parts for wear and/or damage, replace if required.					
Check rubber safety surfaces for damage and poor performance, repair or replace if required.					
Check loose fill safety surfaces remove any foreign elements, repair or replace if required.					

Disposal Instructions

All components should be broken down into categories of:-

- 1. Mild Steel - all swing frames, Playzone, Toddlerzone and Teenzone activities, deck frames and springle frames.
- Stainless Steel all slides, mirror panels.
- Aluminium all Playzone and Toddlerzone posts. 3.
- Galavanised steel all chains and Teenzone posts.
- Moulded rubber products without steel inserts all Toddlerzone and Playzone caps and panel edging.
- **Timber** all natural timber, plywood and mdf panels.

Wherever possible these materials should be taken to a specialist recycling organisations and recycled. In some cases where composite materials are used then disposal at land fill sites is the only alternative such as:-

- 7. Moulded rubber product with steel inserts - all seats, deck tops, duo/dizzy disc tops.
- 8.
- High pressure laminate all Toddlerzone and Playzone panels.

 Steel core polypropylene rope all scramble nets, space nets, Playzone and 9. Toddlerzone ropes and rope bridges.