



### Treetops Seesaw Installation Instructions TNB060

Rev 00 Page 1

### Treetops Seesaw Installation Instructions



- 1 Check using the Parts List that none of the components are missing.
- 2 Plan the final position of the play equipment ensuring there is sufficient space.
- 3 Excavate the foundation holes in accordance with the plan.
- 4 Sort and identify parts before assembly.
- 5 Assemble the rubber bumps stops onto their ground fixings as shown in this document.
- 6 Place the bump stop ground fixings and the main seesaw ground fixing in their foundation holes and fill with concrete. Ensure ground fixings are level and at the correct depth with regard to the finished play level after surfacing.
- 7 When the concrete has set (2 3 days), fit the top seesaw assembly.
- 8 Tighten all fixing bolts.
- 9 Do not allow the equipment to be used until the concrete has completely set and the required safety surfacing has been installed.
- 10 Follow the maintenance instructions supplied.

### NB


During installation care must be taken to prevent hazards to children. Extra care should be taken if conditions are abnormal.


Rev 00 Page 2

### **Treetops Seesaw Parts List**

TNB060 Treetops Seesaw Parts List			de Mal Olay	Cliffe Play
Ref Description	Qty		110	Ç.
TNB061 Seesaw Plank TNB064 Upper Seesaw Body THF078ZP Square Spindle TNB066 Lower Seesaw Body TNB069 Seesaw Ground Fixing PED007 Bump Stop Ground Fixing TNB001D Rubber Bump Stops TNB063 HDPE Seat TNB062 Seesaw Handles BRG122 Bearing TNB255 Bearing Housing TNB067 Upper Body Panel TNB068 Nylon Cover Plate PZA220 Foot Rest TNB060F Fixing Kit (some additional fixings are provided in case of breakages / loss).	1 1 1 2 1 2 2 4 4 4 2 2 2 2 2 2 4	BRG122	TNB255B00	TNB068
TNB062 TNB063	TNB061 Tr	THF078ZP	TNB067	PZA220BG
PED007	The second secon	TNB066		
		TNB069		TNB001D
Rev 00				Page 3


### **Treetops Seesaw Installation Instructions**

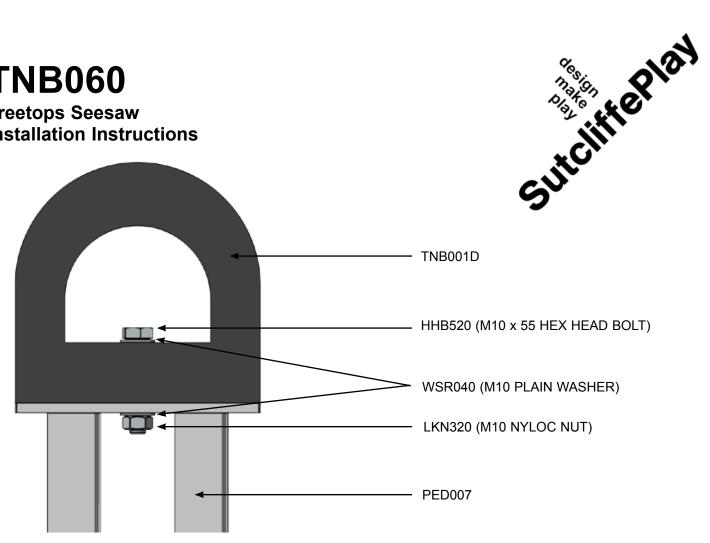


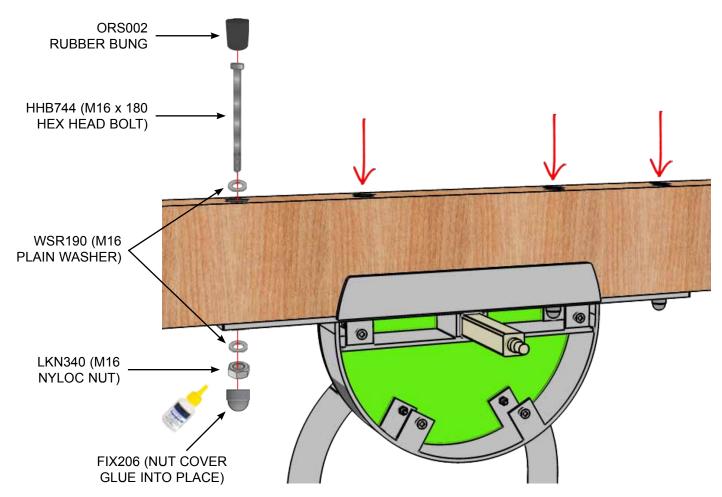


**Treetops Seesaw Installation Instructions** 


## SuicliffePlay

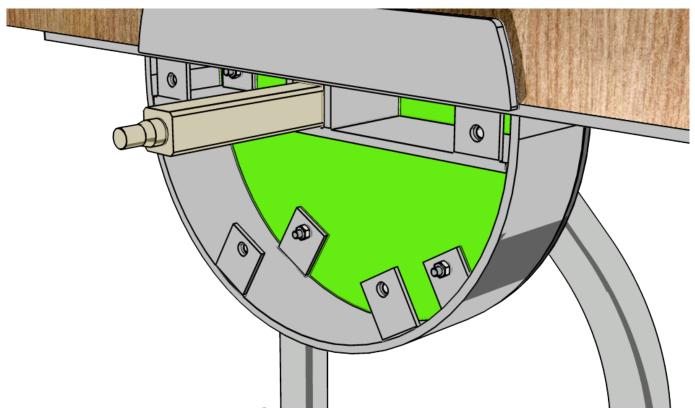

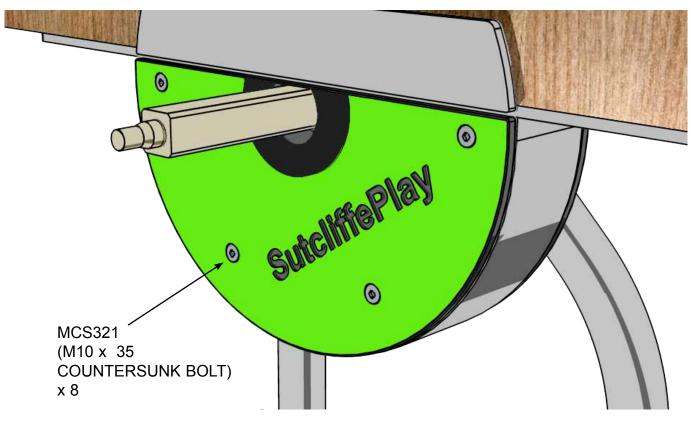

# TNB060 Treetops Seesaw Installation Instructions TNB068 MCS306 (M10 x 20 COUNTERSUNK BOLT)

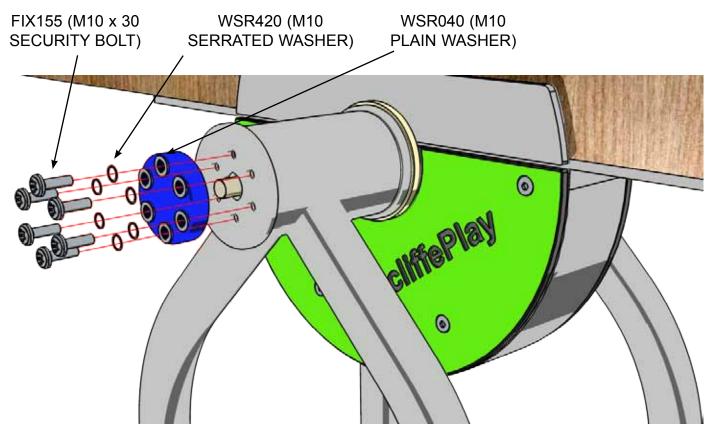

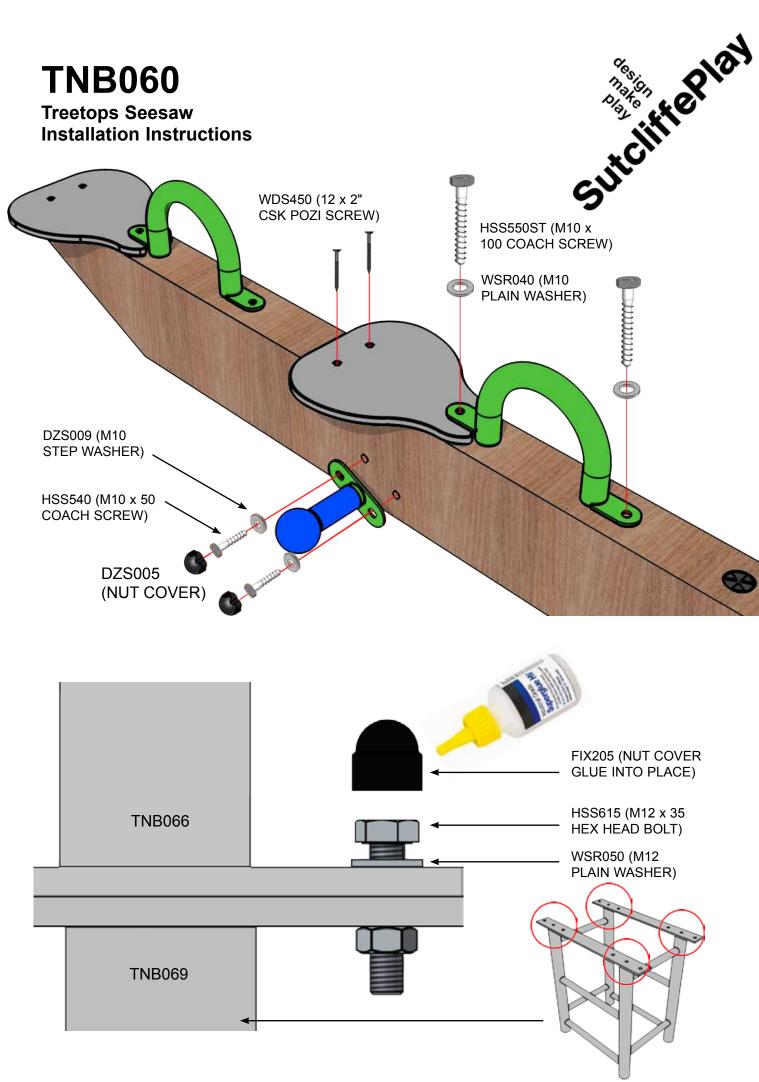

Rev 00 Page 7

### **Treetops Seesaw Maintenance Instructions**

### NOTE

The warranty is invalidated if these instructions are not followed. All wood needs annual inspection and retreatment where required.

Recommended Regular Inspection and Maintenance	Interval Days 7 14 28 56		365	
Check stability of structure, tighten connections if required.				
Check timber plank for corrosion and/or rot. Replace if defective.				
Check all painted elements for damage, rub down and repaint or replace as required.				
Check rotating and pivot points for wear and smooth running lubricate or replace if required.				
Check rubber bumps stops for wear and/or damage, and replace if the rubber is deteriorating.				
Check rubber safety surfaces for damage and poor performance, repair or replace if required.				
Check loose fill safety surfaces, remove any foreign elements,				

Suicliffe Plai

### **Disposal Instructions**

All components should be broken down into categories of:-

- 1 Mild Steel all handles, foot rests, ground fixings and framework.
- 2 Stainless Steel some fixings.

rake level and top up if required.

- 3 Galvanised Steel bump stop ground fixings.
- 4 Moulded Rubber Products without steel inserts bump stops and bungs
- 5 **Timber** Glulam larch timber plank.

Wherever possible these materials should be taken to specialist recycling organisations and recycled. In some cases where composite materials are used, then disposal at land fill sites is the only alternative such as:

- 6 Plastic HDPE seats, Nylon cover plate and nut covers.
- 7 High Pressure Laminate routed panels.

Rev<sub>00</sub> Page 8