## **SDD100**

Dizzy disc Technical information sheet REV 03

# Sutcliffe Play


Dizzy disc Code: SDD100 Sheet 1 of 3




The site must be level to maintain critical dimensions.



### Foundations for bark/sand

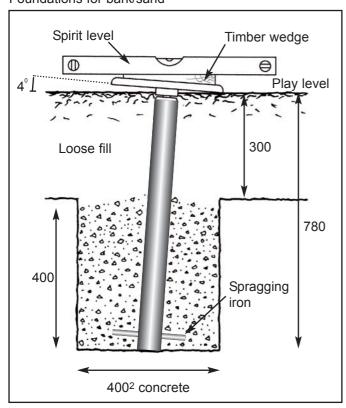

### Foundations for wet pour/tiles

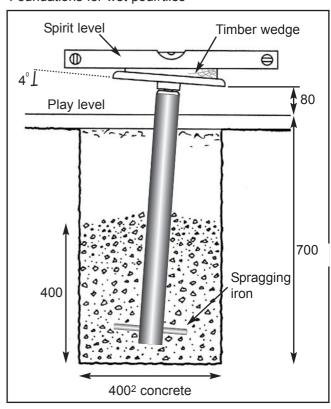

### Dizzy disc Installation procedure

### **REV 03-**

- **1.** Plan the final position of the play equipment ensuring there is enough space\*.
- **2.** Excavate the foundation holes in accordance with the plan\*\*.
- **3.** Place assembly into the hole. See diagrams for position of disk in relation to the play surface/level.
- **4.** For the Dizzy disk to operate as intended it must be installed at a 4° angle, use the wedge provided in conjunction with a spirit level to obtain this angle.
- 5. Fill in the foundation hole to the required depth with concrete.
- **6.** Support the disk in the correct position and do not allow the equipment to be used until the concrete has set. (2-3 days)
- 7. Check all the fixings bolts are tightened.
- 8. Follow the maintenance instructions supplied.

- \* Care should be taken while installing to decrease the hazard for children
- \*\* Care should be taken if the conditions aren't normal.

### Space requirements

- 1. Safety surface recommended 9.0 m² based on 1.65 m from the center of the equipment (HIC 1M)
- 2. Length of the safety perimeter 11m.

		_					
Parts list							
Item	Description	Qty.	Stock No.				
1	Dizzy disk assy	1	SDD100				
<u> </u>							

### Required tools:

Tape measure Spirit level Digging implements 4° Wedge

## Suitcliffe Play

Sut City of the Plant of the Property of the State of the

## **SDD100**

Dizzy disc

**REV 03** 

SDD100 Dizzy disc		,	for children	<sup>(a)</sup> , 0	KO
Maintenance Instructions				4OX	
REV 03			6		
		C	31		
Recommended Regular Inspection and Maintenance	7	Inte	erval (d 28	days) 56	365
Check stability of structure, tighten connections if required.					
Check all uprights at ground level for corrosion and/or rot. Replace any defective parts.					
Check all painted elements for damage, rub down and repaint or replace as required.					
Check chain/ropework assemblies for wear and damage, replace if required.					
Check rotating and pivot points for wear and smooth running lubricate or replace if required.					
Check rubber parts for wear and/or damage, replace if required.					
Check tension of cables, adjust if required.					
Check wear of cables replace if required.					
Check slide chutes for smoothness and any foreign elements, remove any found.					
Check rubber safety surfaces for damage and poor performance, repair or replace if required.					
Check loose fill safety surfaces remove any foreign elements, rake level and top up if required.					

### **Disposal Instructions**

All components should be broken down into catagories of:

- Mild steel all swing frames, Playzone, Toddlerzone, Teenzone activities, deck frames and springie frames.
- Stainless Steel all slides, mirror panels. 2.
- Aluminium all Playzone and Toddlerzone posts and Playzone post caps. 3.
- 4. Galavanised steel - all chains and Teenzone posts.
- 5. Moulded rubber products without steel centres - all Toddlerzone caps and edge details.
- Timber all natural timber, plywood and mdf panels.

Wherever possible these materials should be taken to specialist recycling organisations and recycled. In some cases where composite materials are used then disposal at land fill sites is the only alternative such as:

- 7. Moulded rubber products encasing steel centres - all seats, deck tops, duo/dizzy disc tops.
- High pressure laminate all Toddlerzone, Playzone panels. 8.
- Steel core polypropylene rope all scramble nets, space nets, Playzone/Toddlerzone ropes and rope 9. bridges.